MONUMENT RECORD

Corner ID: **ClCr_W25**

South 1/4 Corner

Section 36- T07N-R01W, 2nd P.M.

Clear Creek Township, Monroe County, Indiana



MONUMENT: *Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)*
1/2" rebar with illegible yellow plastic "FARKAS" cap found flush.

MONUMENT LOCATION SKETCH:

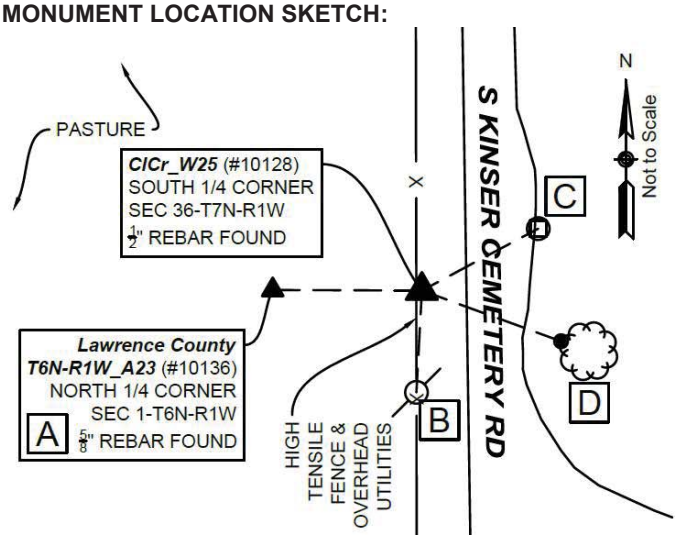

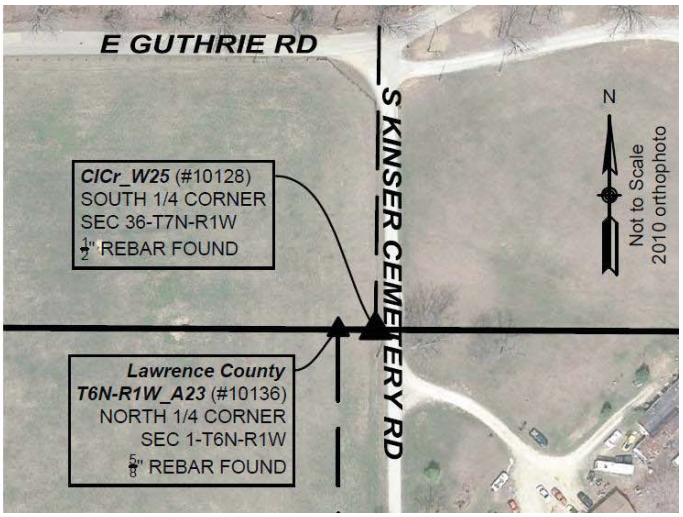

WITNESS MONUMENT TIES:

ID	*Bearing*	*Distance*	*Description*
A	N 89° 47' 09" W	32.93'	5/8" rebar with damaged Bynum Fanyo cap found flush
B	S 03° W	22.5'	Monroe County "PROTECT NEARBY SURVEY MARKER" sign found 4.45' above grade on the north side of 11" utility pole #UDWI 109035
C	N 62° E	29.1'	Mag nail found 0.2' above grade on the north side of a 4" x 4" mailbox post
D	S 70° E	32.7'	Mag nail found 0.7' above grade on the west side of a 48" bifurcated black oak stump carved into two bears

PHOTO IDENTIFIED: *Photo Date:* 4/1/2019

Photo Orientation & Description: ClCr_W25

Photo Orientation & Description: Looking east at ClCr_W25

OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph
119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

MONUMENT RECORD

Corner ID: **ClCr_W25**

South 1/4 Corner

Section 36- T07N-R01W, 2nd P.M.

Clear Creek Township, Monroe County, Indiana



Photo Orientation & Description: Looking south at ClCr_W25

Photo Orientation & Description: Looking north at ClCr_W25

EXISTING SURVEY HISTORY *Include as much detail and history of the corner as known at the time of perpetuation*

ORIGINAL GOVERNMENT SURVEY:

Year Surveyed: March 31, 1811 *By:* A. Henrie
Where filed or recorded: MCSO Original Survey Book Page 1
Original monument: Wood quarter section post
Bearing Trees or Reference Monuments:

Species	*Dia.*	*Bearing*	*Distance*
Beech	6"	N 18° W	12 lks
Beech	5"	S 45° W	6 lks

Notes: Closing corner was not originally set. Calculated location is 50 links (33 feet) west

SUBSEQUENT CORNER RESTORATION:

No legal survey records found for this corner

SUBSEQUENT CORNER RESTORATION:

Date Surveyed: 10/22/1866 *By:* L. Duncan, LCS
Where filed or recorded: Lawrence Co. West Book, page 278
Original monument: Stone at the closing corner
Bearing Trees or Reference Monuments: Not witnessed

SUBSEQUENT CORNER RESTORATION:

Date Surveyed: 2/24/2012 *By:* Kevin Enright, MCS
Where filed or recorded: MCSO Monument Record
Original monument: Not found, found rebar w/ Farkas cap
Bearing Trees or Reference Monuments: See archived Monument Record.

OTHER SURVEY HISTORY: *Include details such as surveyor name, date, recording info, monument description, etc.*

A 6' steel fence post is shown at this corner on a survey by Edmund Farkas dated 4/13/1990 and recorded in Survey Cabinet S, Envelope 1 as Instrument Number 00305139. On a survey dated 6/9/1993, on file as RSID000849, Mike Arena found an iron pin that, based on the provided distances, we presume to be the 1/2" rebar with Farkas cap. Arena accepted the monument as on the north/south center of Section 36, but 3.95 north of the Township line. On a survey dated 11/5/1993, on file as RSID000399, Douglas Curry accepted the 1/2" rebar. The Farkas rebar was also accepted by Eric Deckard on a survey dated 4/19/2004, recorded in Survey Cabinet S, envelope 223 as Instrument Number 2005014275.

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND: *Include, search area or areas, search procedure, etc.*

Date of Field work/Search: 4/1/2019 *By:* R.Oser *Monument Found:* 1/2" rebar with faded yellow Farkas Cap found flush *BTs or Reference Objects Found:* No original witnesses found. Found all witnesses from 2012 Monument Record *Project #:* T07NR01W36 *Field Book:* 50/9 *Notes:* We did not search for a stone. There are no trees in the area and we do not have a legal survey record of a stone at this corner

OTHER EVIDENCE: *Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.*

The rebar is on the west side of Kinser Cemetery Road, three feet east of a north/south fence line.

MONUMENT PRESERVATION: *Describe work done to preserve existing monument.*

We witnessed the monument, but did not set a t-post next to it because it is in a mowed area.

THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*

The Farkas survey did not describe the methodology used to establish this monument. It was accepted with 3.95 feet of uncertainty



north/south, and 0.64 feet of uncertainty east/west.

GEODETIC COORDINATES: *Northing:* 1364005', *Easting:* 3126832'

BASIS OF GEODETIC COORDINATES: The basis of bearings is Grid North System NAD83 (2011)/Indiana West NAVD 88, Epoch 2010.0000, geoid12b_conus.db3, US Survey Feet. Tied to NSRS using the JAVAD GNSS Data Online Processing Service (DPOS) to post-process static observations collected with a Javad Triumph 2 base. Positional values of this corner were determined from static GNSS and RTK GNSS (Javad Triumph LS Rover) observation.

This document is not complete without the associated Corner Perpetuation plat and report of survey for Section 36-T7N-R1W by Rachel Oser of the Monroe County Surveyor's Office dated August 5, 2019 and recorded as Instrument Number 2019011075 in the office of the Monroe County Recorder.

CERTIFICATIONS:

Date: August 5, 2019
Rachel Oser, State of Indiana
PS No.21100022

Date: August 8, 2019
Trohn Enright-Randolph
Monroe County Surveyor

Accepted by the Monroe County Surveyor Review Board on August 6, 2019

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 36 **Township:** 7 North **Range:** 1 West **Corner ID:** ClCr W-25

Monument Description & Remarks: 1/2" Rebar with cap, "E. FARKAS". Survey Sign 4.5ft above ground at point B

References On File: E. Farkas survey, M. Deckard (1990), on file in Recorder Office cabinet S, envelope 1; Eric L. Deckard survey, Garton - Guthrie Boundary (2004), on file in Recorder Office cabinet S, envelope 223/224; Douglas R. Curry survey, Horrell Boundary (2005), on file in Recorder Office cabinet S, envelope 293

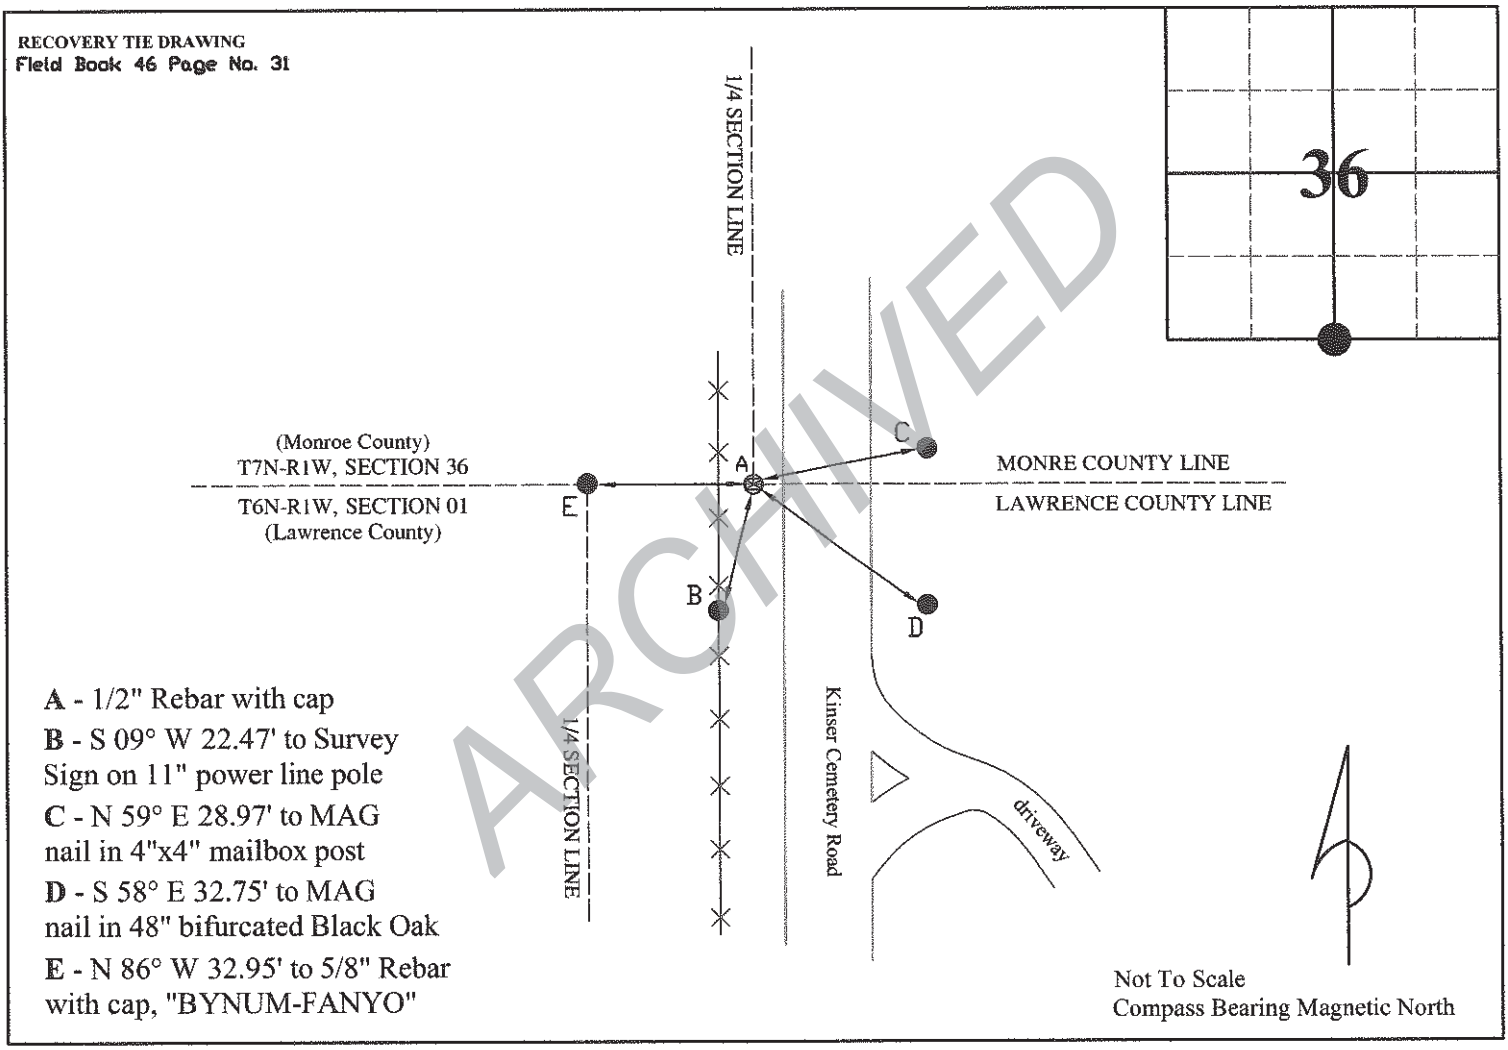

ARCHIVED

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-2-12-11 of the Indiana Code; and the above data is given under my hand and seal this 24th day of February, 2012.

Kevin Enright

SURVEYOR SEAL MONROE COUNTY INDIANA

MONROE COUNTY SEAL SURVEYOR REVIEW BOARD

Administered by the Monroe County Surveyor Review Board.

Date: 4-10-2012

Drawn by: T.E.R Print date: March 01, 2012